


TUSA-81211-P360 Project Light Specification

ver 4.0


Features & Specifications:

1. Bridgelux LED Chip – COB
2. Meanwell Power Supply
3. Patented die cast design constructed with Ultra Thermal ADC 12 Aluminum results in outstanding heat dissipation
4. Different beam angles available using impact & corrosive resistant glass lens
5. IP65 Waterproof
6. Dimming opt: 1-10V or PWM
7. Horizontal Module Installation
8. Driver, Modules and Optics can be easily replaced
9. CE & RoHS Certification
10. 5 year limited warranty

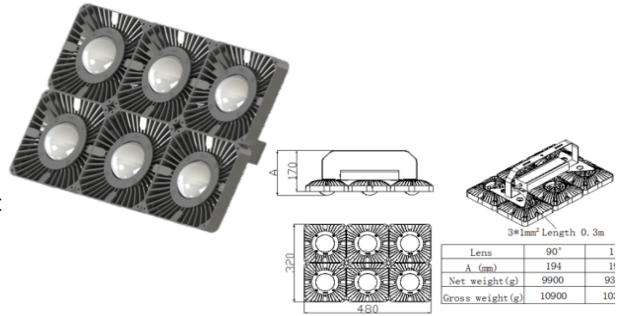


Application:


S Industrial Parks, stadiums, building lighting



Socket Type



Ceiling Installation




Wall Mounting

TUSA-81211-P360 Project Light Specification

| Model | 8NC | Power | LED Efficiency | Ra | Beam angle | CCT | Input Voltage | Power Factor | Hz | Operating Temperature |
|--------------------------|----------|-------|----------------|-----|------------|------------|------------------------------|--------------|---------|-----------------------|
| TUSA-81211-P360 (745/H2) | 80031611 | 360W | 158lm/w | >70 | 60° | 4500-5500K | AC90-305V / DC127-430v | >0.95 | 47-63Hz | -40°C to -50°C |
| TUSA-81211-P360 (745/M2) | 80031612 | | 135lm/w | | | | | | | |
| TUSA-81211-P360 (745/H3) | 80031613 | | 135lm/w | | | | | | | |
| TUSA-81211-P360 (745/M3) | 80031614 | | 125lm/w | | | | | | | |

| PACKAGING | INNER | OUTER | N.W. | G.W. | CARTON SIZE | 20' QTY (WITH PALLET) | 40' QTY (WITH PALLET) |
|-----------|-------|-------|--------|--------|--------------------|-----------------------|-----------------------|
| | 1 PCS | 1 PCS | 10.0Kg | 10.5Kg | 500 X 350 X 200 MM | 480 PCS | 960 PCS |



TITANS USA LTD

4371-112TH TERRACE NORTH-CLEARWATER, FLORIDA 33762

TELEPHONE (727) 290-9897 FAX (727) 573-2591

sales@titansusa.com

titansusa.com titans.com.cn